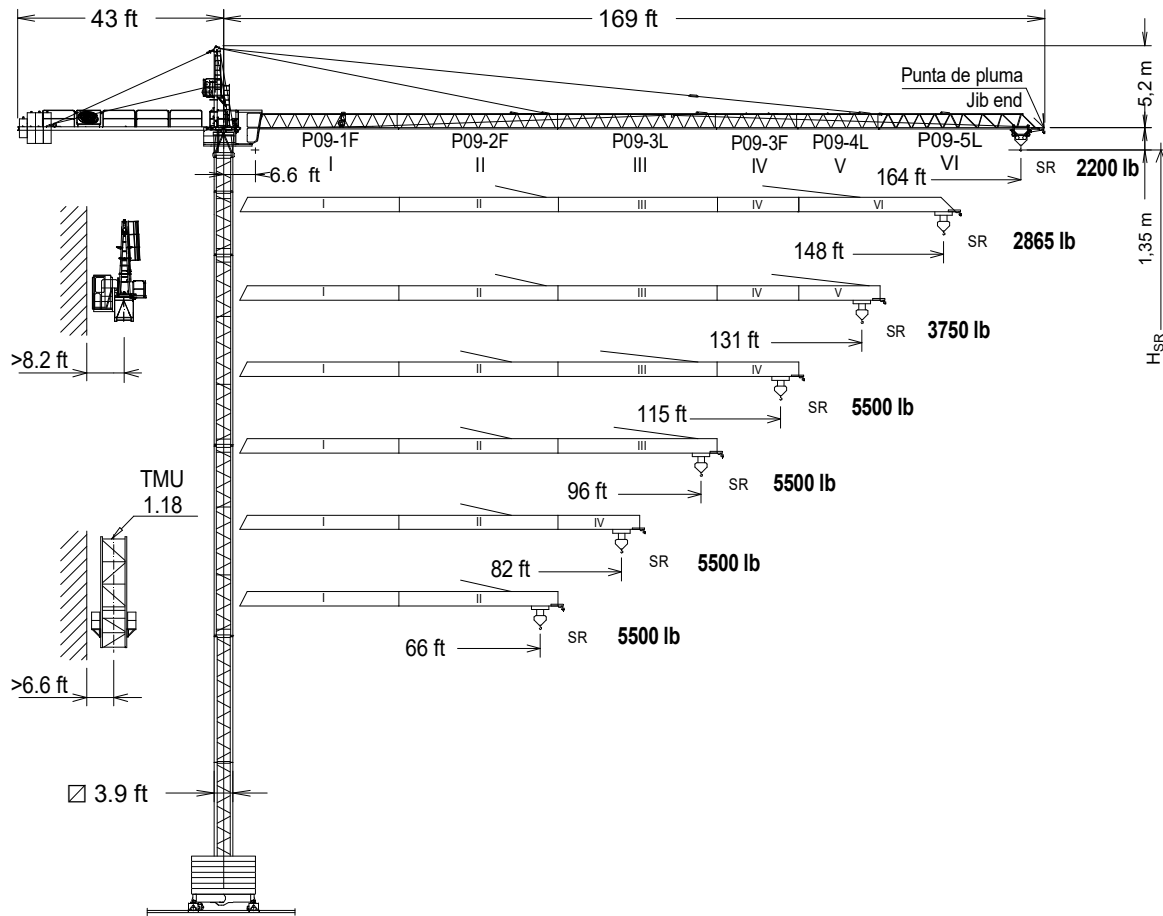




EN 14439
C25

UNE-EN-ISO 9001



H_{SR} = Altura máxima bajo gancho sin arriostrar (m).
Maximum height under hook without fastening (m).



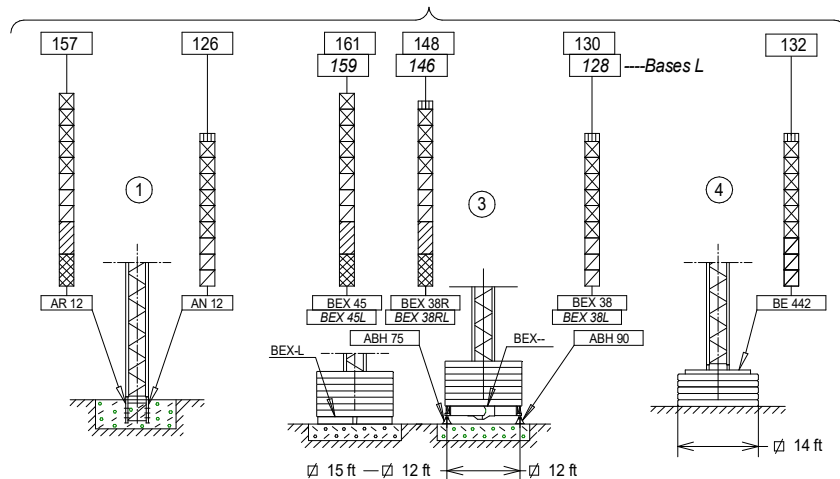
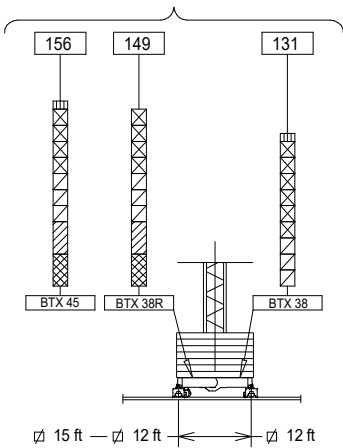
$H_{SR} = 6.6$ ft.

* Punta de pluma / Jib end

TMU 1.18	202.35.500	TN 4	146.32.000
P09-1F	157.40.000	TN2	146.32.500
P09-2F	157.41.000	BTX 45/BEX 45	137.20.500
P09-3L	155.42.000	BTX 38R/BEX 38R	137.20.000
P09-3F	157.43.000	BTX 38/BEX 38	149.20.000
P09-4L	155.43.000	BEX 45L	155.23.500
P09-5L	155.44.500	BEX 38RL	155.23.800
Punta de pluma / Jib end*	155.45.000	BEX 38L	155.23.000
TR 12	146.30.000	ABH 75	152.23.000
TN 12	146.31.000	ABH 90	146.23.000
TR 8RM	202.30.000	AR 12	137.21.000
TR 8M	146.30.800	AN 12	146.21.000
TR 4	800.32.300	BE 442	146.24.850

(H) TRASLACIÓN / TRAVELLING

(H) ESTACIONARIA / STATIONARY



- TN 2
- TR 8RM
- TR 8M
- TN 4
- TN 12
- TR 4
- TR 12





Fecha / Date: 04/06/2020



FEM 1005 - C25

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability










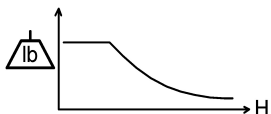
CARGAS / LOADS
J5010

 SR1 (lb)		Cargas máximas / Maximum loads SR1 - 4400 lb						
 [ft]	@...[ft]	Alcance del gancho [ft] / Hook reach [ft]						
		66	82	98	115	131	148	164
164	90	4400	4400	3970	3340	2870	2500	2200
148	101	4400	4400	4400	3810	3280	2870	-----
131	113	4400	4400	4400	4340	3750	-----	-----
115	115	4400	4400	4400	4400	-----	-----	-----
98	98	4400	4400	4400	-----	-----	-----	-----
82	82	4400	4400	-----	-----	-----	-----	-----
66	66	4400	-----	-----	-----	-----	-----	-----


CARGAS / LOADS
J5010

 SR2 (lb)		Cargas máximas / Maximum loads SR2 - 5500 lb						
 [ft]	@...[ft]	Alcance del gancho [ft] / Hook reach [ft]						
		66	82	98	115	131	148	164
164	73	5500	4850	3970	3340	2865	2500	2200
148	82	5500	5500	4520	3810	3280	2870	-----
131	92	5500	5500	5150	4340	3750	-----	-----
115	115	5500	5500	5500	5500	-----	-----	-----
98	98	5500	5500	5500	-----	-----	-----	-----
82	82	5500	5500	-----	-----	-----	-----	-----
66	66	5500	-----	-----	-----	-----	-----	-----

CARACTERISTICAS DE MECANISMOS / MECHANISMS FEATURES
J5010

*opcional *optional														
	EC1846 SR2 13,2 kW		EC1856 SR1 13,2 kW		*EC2566VF SR2 18,4 kW	*EC2580VF SR1 18,4 kW	9 / 12/ 15 ft TG825VF 2x3 kW	OG708VF 5,5 kW	TC360 / *TC360VF 1,9 / *1,8 kW	TH1010 9,2 kW				
 lb ft/min	2870	5510	5510	2425	4410	4410	2870	5510	2425	4410	0...82 ft/min	0... 0,8 r/min sl/min	98/196 ft/min *0...98 *98...196 ft/min	3.3 ft/min
 H	H ≤ SR 633 ft				SR 620 ft			EC1846 EC1856		AMPERAGE = 42 A				
								480V 60Hz	EC2566 VF EC2580 VF		AMPERAGE = 51 A			

LASTRES INFERIORES / LOWER BALLASTS
J5010

		H (ft)		59	72	98	131	156	161
BEX 45 / BTX 45				6		8	10	14	16
BEX45L				8			10	14	16
BEX 38R / BTX 38R				6	8	10	12	16	----
BEX 38 / BTX 38				6	8	10	12	-----	-----
BEX 38RL				8		10	12	16	----
BEX 38L				8		10	12	-----	-----
		H (ft)		105			132		
BE 442				7600 lb		16		20	










H: Altura bajo gancho / Height under hook

Para alturas intermedias tomar el lastre correspondiente a la altura superior / For intermediate heights take the ballast corresponding to the higher height

Fecha / Date: 04/06/2020

 **FEM 1005 - C25**


Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability

DENOMINACIÓN / DENOMINATION		L [ft]	A [ft]	H [ft]	P / W [lb]	
Torre Tower	TR 8RM – TR 8M	26.5	3.9	3.9	5675-5545	
	TR 12 – TN 12	39.4	3.9	3.9	6260-6130	
	TR 4	13.0	3.8	3.8	2360	
	TN 4	13.4	3.9	3.9	2325	
	TN 2	7.5	3.9	3.9	1730	
Conjunto asiento pista, punta de torre, orientación y elevación <i>Slewing table assembly, tower head, slewing and hoisting mechanism</i>			22.9	5.4	7.9	9020
Tramo de pluma <i>Jib section</i>	P09 1F (I)	33.3	3.3	3.8	1555	
	P09 2F (II)	33.3	2.8	3.6	1235	
	P09 3L (III)	33.3	2.8	3.6	1245	
	P09 3F (IV)	17.3	2.8	3.3	520	
	P09 4L (V)	17.3	2.8	3.6	550	
	P09 5L (VI)	33.2	2.8	3.6	900	
Polipasto <i>Hook assembly</i>	SR		2.5	0.5	3.1	300
Carro <i>Trolley</i>	SR		3.3	4.4	2.4	245
Contrapluma con plataformas <i>Counterjib with platforms</i>			39.2	4.4	1.3	2080
Plataforma y cabina <i>Platform and cabin</i>			12.1	5.3	7.4	1810
Contrapeso <i>Counterweight</i>	Grande / Big		3.5	1.6	6.6	5205
	Pequeño / Small		3.5	1.6	4.3	3305
Base grúa Testero largo <i>Crane base Long carriage</i>	BTX 38	20.0	2.1	5.0	3475	
	BTX 38R	20.0	2.1	5.2	3950	
	BTX 45	23.0	2.1	5.2	4550	
	BTX 38L	17.9	1.8	3.2	2555	
	BTX 38RL	17.9	1.8	2.9	1875	
	BTX 45L	13.2	1.8	2.9	1455	
	BEX 38	18.2	1.0	4.2	3065	
	BEX 38R	18.2	1.0	4.6	3505	
	BEX 45	21.5	1.0	4.6	4105	
Mecanismo traslación grúa <i>Crane travelling mechanism</i>			3.1	1.8	2.2	645
Lastre <i>Ballast</i>	Ø 8 ft	9.8	1.4	4.3	8155	
	Ø 12 ft - Ø 15 ft	13.1	1.1	4.3	9040	
	BE 442	6.9	1.1	6.9	7605	
	BE 434	11.2	1.1	5.5	9480	
Torre de montaje <i>Jacking cage</i>	TMU 1.18	23.4	5.8	5.6	7055	
Torre de montaje sin puerta, carro, plataforma carro y viga de apoyo <i>Jacking cage without door, trolley, trolley platform and beam assembly</i>		23.4	5.8	5.6	5400	

T	H								H	T
1	15		TN 4						15	1
2	28		TN 4						28	2
3	67		TN 12						67	3
4	106		TR 12						106	4
5	132		TR 8M						132	5
6	144		TX-90/TXXR						144	6
7	154		T 3-90						154	7
8	163								163	8
9	173								173	9
			T6-150A	183	9					
			T6-150	202	10					
			AN 90							
			AN 150							
			AL 20							
			ALD 20							
			AS 20							
			ASD 20/24							
			ASR 20							
			ASRD 20/24							

T: Torre / Tower
H: Altura / Height

Otras configuraciones de torre / Other tower configuration

Transporte / Transport

H = 126 + AN12

2x

3x **HIGH CUBE 40'**

≤ 6xTN4

TREPADO / CLIMBING

J5010

$h_{max}: 3xTR4 + 6xTN4$

	▶	■
h (ft)	118	
D (ft)	29.8 – 32.8	
P (lbf)	76880	71260
Rmax (lbf)	20680	56200

TR4: 800.32.300

Trepado interno / Internal climbing

- Viento fuera de servicio / Out of service wind
- Consultar / Consult
- En servicio / In service
- Fuera de servicio / Out of service



Ctra./Rd. Madrid - Irún Km. 415 - 20.213 IDIAZABAL [Gipuzkoa] ESPAÑA / SPAIN
 P.O. Box, 23 - 20.200 BEASAIN - E-mail: jaso@jaso.com
 Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20
www.jaso.com

Fecha / Date: 04/06/2020

FEM 1005 – C25

DELEGACION / DEALER